

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 405 793 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(21) Application number: 90306443.4

(51) Int. Cl.<sup>5</sup>: **C08L 23/12, //(C08L23/12, 23:20)**

(22) Date of filing: 13.06.90

(30) Priority: 26.06.89 US 371713

(43) Date of publication of application:  
02.01.91 Bulletin 91/01(64) Designated Contracting States:  
CH DE FR GB IT LI NL SE(71) Applicant: MINNESOTA MINING AND  
MANUFACTURING COMPANY  
3M Center, P.O. Box 33427  
St. Paul, Minnesota 55133-3427(US)

(72) Inventor: Rolando, Richard J.c/o Minnesota


Mining and  
Manufact. Comp., 2501 Hudson Road, P.O.  
Box 33427  
St. Paul, Minnesota 55133-3427(US)  
Inventor: Krueger, Dennis L, c/o Minnesota  
Mining and  
Manufact. Comp., 2501 Hudson Road, P.O.  
Box 33427  
St. Paul, Minnesota 55133-3427(US)

(74) Representative: Baillie, Iain Cameron et al  
c/o Ladas & Parry Isartorplatz 5z 5  
D-8000 München 2(DE)

(54) Radiation resistant heat sealable polymer blends of compatible polymers and methods of preparing same.

(57) Polymer blends of non-crystalline mesomorphous polypropylene and a polymer compatible with such polypropylene and the method of making such polymer blends are provided. Such compatible polymer blends exhibit substantial maintenance of structural integrity after exposure to gamma irradiation and provide heat sealing properties, puncture resistance, and tear strength. Films, fibers, and other articles made from such blends may be used in various applications, including medical articles such as medical packaging films, ostomy pouches, and transdermal delivery patches, which may require sterilized storage prior to usage.

EP 0 405 793 A2

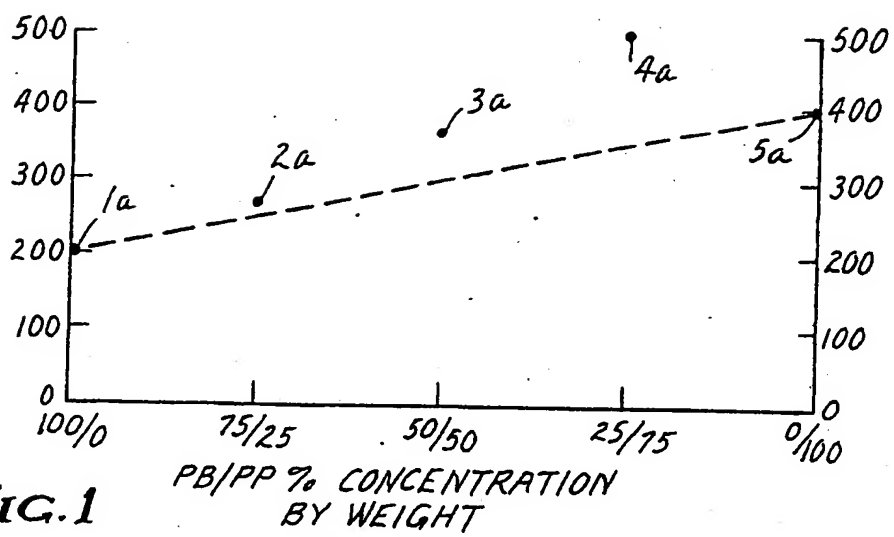

# **RADIATION RESISTANT HEAT SEALABLE POLYMER BLENDS OF COMPATIBLE POLYMERS AND METHODS OF PREPARING SAME**

## Field of the Invention

This invention relates to polymer blends of compatible polymers resistant to the effects of sterilization irradiation, methods for preparing such polymer blends, and articles, such as fibers, films, and nonwoven fabrics incorporating such polymer blends. More particularly, this invention relates to polymer blends of non-crystalline mesomorphous polypropylene and polymers compatible with such polypropylene. Films of such blends may be used as heat sealable packaging for medical articles requiring sterilized storage, heat sealable backings for transdermal delivery medical packaging, or as heat sealable components for use as ostomy pouches also possibly requiring sterilized storage.

## Background of the Invention

Polypropylene is often a material of choice for medical articles due to its various properties such as non-toxicity, chemical resistance and inertness to drugs and liquid media used with drugs, as well as its low cost and ease of processing by means of extrusion, molding, and the like.

However, a disadvantage of crystalline polypropylene is its inherent inability to be heat sealed against another material. Medical articles or packaging for medical articles often require heat sealing in the manufacturing process to assemble the components of the article or the packaging process to protect the active ingredient or medical article in the packaging from undesired exposure.

Medical articles requiring additional protection beyond secure heat sealing in manufacturing or packaging processes can be sterilized at the time of production and thereafter maintained in a sterile condition during storage. Not all medical articles require sterilization prior to usage. But structural components resistant to radiation are more versatile for uses in medical articles and packaging than components unable to maintain structural integrity after irradiation. Thus, the most desirable material for a medical article or the packaging therefor is one which possesses resistance to the structurally demanding forms of sterilization even if current usages of the medical articles do not require such sterilization.

A preferred method of sterilization uses gamma radiation, such as radioactive cobalt 60, since it can be performed on packages sealed by heat or other methods insuring total and reliable sterility of the contents. Unfortunately, gamma-irradiation of crystalline polypropylene causes degradation of its structural integrity (e.g., causing embrittlement, discoloration, thermal sensitivity).

To avoid such degradation, the prior art has employed a variety of stabilizers and other additives. European Patent Publication 0248545 (assigned to the same assignee as for this application), the prior art therein described the efforts undertaken to stabilize crystalline polypropylene from degradation after irradiation.

Conversely, mesomorphous, non-crystalline polypropylene, as described in European Patent Publication 0248545, provides resistance to sterilization irradiation without the necessity of any additive or stabilizer. Control over the method of preparing such mesomorphous polypropylene causes such polypropylene to substantially maintain its structural integrity after sterilization irradiation.

Unfortunately, films for packaging and the like made from polypropylene, even non-crystalline mesomorphous polypropylene, are susceptible to tearing and puncturing that disrupt maintenance of structural integrity as a manufactured product or packaging component after assembly. Usefulness of a sterilized medical article is compromised by a puncture in a polypropylene package. Also, as described above, crystalline polypropylene is not a material which can be heat sealed against another material in order to provide either a multi component medical article or an effective radiation sterilized package.

On the other hand, polybutylene, poly(1-butene) or poly(2-butene) or both, offers many advantages to the medical packaging art that polypropylene, mesomorphous or otherwise, lacks. Polybutylene has high tear strength, high impact strength, puncture resistance. Polybutylene is also often used as a film requiring heat sealability. Reference to the versatility of polybutylene may be found in Shell Technical Bulletin sc: 391-79 (1979). However, polybutylene is highly crystalline (as much as 98% crystalline). After irradiation, the melt index of polybutylene has increased, indicating chain scission. See Bradley, Journal of Industrial Irradiation Technology (2) 93-138 (1984). Hence, polybutylene packaging usually degrades over the effective storage life often needed for a medical product.

Neither crystalline polypropylene nor crystalline polybutylene substantially maintain structural integrity

after sterilization irradiation. Mesomorphous polypropylene lacks desirable strength packaging properties. No single polymer combines radiation resistance and several good packaging properties, e.g. tear strength, puncture resistance, and heat sealability.

Thus, what is needed is a heat sealable medical packaging material having good strength which substantially maintains its structural integrity for a useful period, even after exposure to the irradiation dosages necessary to sterilize such material.

### Summary of the Invention

10

The present invention overcomes the deficiencies of crystalline polypropylene, crystalline polybutylene and mesomorphous polypropylene for medical articles or their packaging by providing a polymer blend which has good tear strength, puncture resistance, and heat sealability against another material and which substantially maintains its structural integrity over a useful life, even after irradiation. Such polymer blends  
15 comprise non-crystalline mesomorphous polypropylene and at least a discernible amount of a polymer "compatible" with non-crystalline mesomorphous polypropylene.

This invention concerns polymer blends of non-crystalline, mesomorphous polypropylene and a "compatible polymer".

For purposes of this invention, the definition of "polymer" includes a homopolymer, an oligomer, a  
20 mixture of a homopolymer and an oligomer, a mixture of more than one homopolymer, a mixture of more than one oligomer, a mixture of a homopolymer and a plurality of oligomers, a mixture of an oligomer and a plurality of homopolymers, or a mixture of a plurality of homopolymers and a plurality of oligomers.

The definition of "compatible" is material for an understanding of the present invention. Those skilled in the art, such as Sonja Krause in her article, "Polymer-Polymer Compatibility" appearing as Chapter 2 in  
25 Polymer Blends, Paul and Newman, Ed., Academic Press, New York, 1978, at pages 16-18, recognize several possible definitions of compatibility of polymers, some based on the miscibility, on a molecular scale, of homopolymers and of random copolymers. One of the definitions of polymer-polymer compatibility is that the polymer mixtures have desirable physical properties when blended.

For purposes of this invention, a blend comprising non-crystalline mesomorphous polypropylene and a  
30 "polymer compatible with said polypropylene" is a blend that at least one weight fraction has a more desirable specific physical property, a greater percent elongation at break value, than the hypothetical percent elongation at break value computed by the sum of the proportionate elongation at break values of the constituents of the blend according to the following equation:

Hypothetical percent elongation at break = ((Weight percent of mesomorphous polypropylene in the  
35 blend) X (Percent Elongation at Break of mesomorphous polypropylene)) + ((Weight percent of polymer in the blend) X (Percent Elongation at Break of the polymer)).

Expressed in other words, "compatibility" of a "polymer compatible with said polypropylene" mixed with non-crystalline mesomorphous polypropylene in a blend exists at any specific blended weight fraction when the percent elongation at break of that blend of the polymers is greater than the hypothetical value  
40 established by plotting a straight line between the percent elongations at break of the respective polymers. Graphic representations of polymer-polymer compatibility of several blends of the present invention are described in the Embodiments of the Invention.

It is desirable, but not necessary, for a blend of the present invention to have a consistently greater percent elongation at break value as compared with the hypothetical linear value of the percent elongation  
45 at break for the blends across a variety of weight fraction. But it is necessary within the scope of the present invention to have at least one blend weight fraction have a percent elongation at break value which is greater than the hypothetical linear value for that blend weight fraction.

The percent elongation at break property for polymer blends is chosen as the physical property for determination of compatibility because it is the best measurement to record the effects of irradiation of the  
50 polymer blend. A polymer blend which does not substantially maintain its structural integrity during at least two months after sterilization irradiation begins to rapidly degrade or embrittle. Percent elongation at break measures the extent of degradation or embrittlement. A substantially constant percent elongation at break measured over several months after irradiation is indicative of substantial maintenance of structural integrity of a polymer blend over that period after irradiation.

55 The invention further provides a method for the preparation of the polymer blend by the blending of polypropylene and a polymer compatible therewith, extruding such blend of polymers, quenching such extruded polymer blend immediately after extruding to provide a mesomorphous polymer blend having non-crystalline mesomorphous polypropylene contained therein.

The present invention describes and utilizes a blend of non-crystalline, mesomorphous polypropylene with a polymer or polymers compatible with such polypropylene. These blends optimize the combined physical properties of resistance to radiation, if needed, provided by such non-crystalline, mesomorphous polypropylene with other desirable medical packaging properties not found in polypropylene but provided by the compatible polymer, e.g. toughness, puncture resistance, and the like.

For an additional appreciation of the scope of the present invention, a more detailed description of the invention follows, with reference to the drawings.

#### 10 Brief Description of the Drawings

FIG. 1 is a graph comparing percent elongation at break values for Examples 1-5 with hypothetical linear values for Examples 1-5.

FIG. 2 is the x-ray diffraction pattern of crystalline polybutylene of Example 1.

15 FIG. 3 is the x-ray diffraction pattern of the polymer blend of Example 2.

FIG. 4 is the x-ray diffraction pattern of the polymer blend of Example 3.

FIG. 5 is the x-ray diffraction pattern of the polymer blend of Example 4.

FIG. 6 is the x-ray diffraction pattern of non-crystalline mesomorphous polypropylene of Example 5.

20 FIG. 7 is a graph comparing percent elongation at break values for Examples 16-19 with hypothetical linear values for Examples 16-19.

FIG. 8 is the x-ray diffraction pattern of the polymer blend of Example 16.

FIG. 9 is the x-ray diffraction pattern of the polymer blend of Example 17.

FIG. 10 is the x-ray diffraction pattern of the polymer blend of Example 18.

FIG. 11 is the x-ray diffraction pattern of the polymer blend of Example 19.

#### 25 Embodiments of the Invention

The polymer blends of compatible polymers of the present invention substantially maintain their structural integrity for a useful period after irradiation. The blends are produced from non-crystalline mesomorphous polypropylene blended with a polymer compatible with such polypropylene.

As described above, compatibility of a polymer with non-crystalline mesomorphous polypropylene is determined by a comparison of the percent elongation at break of a weight fraction of a blend with the hypothetical value of percent elongation at break at that weight fraction as determined by the respective blended polymers in their proportionate weight fraction.

35 Graphically, the determination of a blend of a "compatible polymer" and non-crystalline mesomorphous polypropylene is apparent from an examination of FIG. 1, depicting the unirradiated, zero duration results from Table I below. The percent elongation at break of each example of the blend is greater than the hypothetical value of the percent elongation at break for that blend in that weight fraction. Therefore, each of the weight fractions of the blends is a mixture of non-crystalline mesomorphous polypropylene and a "polymer compatible with said polypropylene".

40 The number of polymers compatible with the non-crystalline mesomorphous polypropylene appear limited. It has been found that polymers compatible with non-crystalline mesomorphous polypropylene include polybutylene (melt index from about 0.4 to about 100); certain polyolefin elastomers produced by Exxon Corporation, such as Exxelor PA-23, which is believed to be an ethylene based elastomer; Arkon  
45 branded resins manufactured by Arakawa Chemical Corporation, which are believed to be fully saturated alicyclic hydrocarbon polymers; atactic polypropylene resins available from Himont USA Inc., of Wilmington, Delaware, and a propylene-ethylene copolymer available under the brand Dypro (R) from Fina Chemical. This list of polymers is not necessarily exhaustive of polymers compatible with mesomorphous polypropylene as "compatible" is defined herein.

50 The optimum weight fraction of the compatible polymer with the mesomorphous polypropylene depends upon the ultimate intended use of the blend and the desired properties. Generally, it is desirable to add as much compatible polymer as possible to provide strength, heat sealability, and other packaging properties without compromising the radiation resistance provided by the mesomorphous polypropylene.

55 However, it is within the scope of this invention to add a discernibly minimal amount of the compatible polymer to mesomorphous polypropylene to provide a blend quenched to preserve mesomorphous polypropylene, having excellent sterilization irradiation resistance and better physical properties such as elongation at break than the mesomorphous polypropylene homopolymer. If the polymer blend having a minimal weight fraction of the compatible polymer can be discerned to have a greater percent elongation at

break value than the hypothetical linear value computed according the equation described in the Summary of the Invention above, then the polymer blend is within the scope of this invention.

Optionally, as little as one percent by weight of the compatible polymer to the weight of the polymer blend, quenched to preserve mesomorphous polypropylene, may form an acceptable polymer blend for certain medical packaging devices to provide a radiation resistant blend having some desirable packaging properties.

It is within the scope of this invention to add a discernibly minimal amount of polypropylene to the compatible polymer to provide a blend, quenched to preserve mesomorphous polypropylene, having excellent medical packaging properties and acceptable radiation resistance. Analogously, if the polymer blend having a minimal weight fraction of mesomorphous polypropylene can be discerned to have a greater percent elongation at break value than the hypothetical linear value computed according to the equation described in the Summary of the invention above, then the polymer blend is within the scope of this invention.

Optionally, as much as ninety-nine percent (99%) by weight of the compatible polymer to the weight of the polymer blend, may form an acceptable blend for certain medical packaging purposes.

Desirably, the weight fraction range of the compatible polymer is from about five percent (5%) to about ninety-five percent (95%) by weight of the compatible polymer to the weight of the polymer blend and more desirably from about ten percent (10%) to about ninety percent (90%) by weight of the compatible polymer to the weight of the polymer blend.

Preferably, for balance of the best properties of mesomorphous polypropylene and the compatible polymer in the blend, a weight fraction of the compatible polymer ranges from about twenty percent (20%) to about eighty percent (80%) by weight of the compatible polymer to the weight of the polymer blend, more preferably from about twenty-five (25%) to about seventy-five percent (75%) by weight of the compatible polymer to the weight of the polymer blend, and most preferably from about forty percent (40%) to about sixty percent (60%) by weight of compatible polymer to the weight of the polymer blend.

Totally optionally, to provide specific additional properties to the polymer blend, the polymer blends of the present invention may also contain conventional additives such as antistatic materials, pigments, dyes, plasticizers, ultraviolet absorbers, nucleating agents, quenching agents such as mineral oil in weight fractions to the polymer blend of about 30-40 percent, and the like. However, the blends do not require any stabilizers, anti-oxidants or the like to enable the blend to withstand the effects of irradiation and substantially maintain structural integrity for a useful period after irradiation.

The process of blending known mixtures of polymers is well known to those skilled in the art. The available methods of blending are well described in the literature, such as, Mathews, Polymer Mixing Technology, Chapter 3 (Applied Science Publishers, Essex, England, 1982). In the case of the present invention, the method of blending involves the use of an extruder by feeding the polymers (in the proper weight percentages) that had been dry-blended together prior to the heated extrusion process.

The polymer blend can be extruded from the polymer melt in any shape which can be rapidly cooled to obtain the polymer blend. The shape and/or thickness of the extruded material will be dependent on the efficiency of the quenching systems utilized. Generally, films and blown microfiber webs are the preferred extruded materials.

To obtain a polymer blend having non-crystalline mesomorphous polypropylene contained therein, the extruded blend must be quenched in a manner such that primarily the mesomorphous phase of polypropylene is obtained. Miller, "On the Existence of Near-Range Order in Isotactic Polypropylenes," in Polymer, One 135 (1960) and in European Patent Application 87304084.4, (EPO Publication 0248545), disclose suitable methods known to those skilled in the art for preparation of mesomorphous polypropylene.

As described by these prior publications, various known methods of quenching as soon as possible, and preferably immediately after extrusion can be used to obtain a polymer blend having non-crystalline mesomorphous polypropylene. Quenching methods include plunging the extruded material into a cold liquid, for example, an ice water bath, spraying the extruded material with a liquid such as water, and/or running the extruded material over a cooled roll or drum. Extruded polymer blended film of the present invention is preferably quenched immediately after extrusion by contact with a quench roll or by plunging the film into a quench bath. For a film thickness of from about 1.0 mil (0.025 mm) to about 10.0 mil (0.25 mm), where a quench roll is used, roll temperature is preferably maintained at a temperature below about 24°C and the film is generally in contact with the roll until solidified. The quench roll should be positioned relatively close to the extruder die, the distance being dependent on the roll temperature, the extrusion rate, the film thickness, and the roll speed. Generally, the distance from the die to the roll is about 0.1 in. (0.25 cm) to 2 in. (5 cm). Where a quench bath is used, the bath temperature is preferably maintained at a temperature below about 40°F (4°C). The bath should be positioned relatively close to the die, generally

about 0.1 in. (0.25 cm) to 5 in. (13 cm) from the die to the bath.

Melt blown microfibers of polymer blends of this invention are produced by extruding molten polymer through a die into a high velocity hot air stream to produce fibers having an average fiber diameter of less than about 10 microns. The fibers are generally collected on a drum in the form of a web. The preparation of microfiber webs is described in Report No. 4364 of the Naval Research Laboratories, published May 25, 1954, entitled "Manufacture of Superfine Organic Fibers," by Wentz, Van A. et al. and in Wentz, Van A., "Superfine Thermoplastic Fibers" in Industrial Engineering Chemistry, Vol. 48, No. 8, August, 1956, pp. 1342-1346.

To achieve webs of the polymer blends of the invention, the blown microfiber web is preferably quenched by spraying with a liquid such as water or by cooling the collector drum onto which the microfiber web is collected. Optimum quenching can be achieved by spraying the fiber web near the die, then collecting the web on a cooled drum. The water spray is preferably at a temperature of less than about 50° F (10° C) and less than about 1 inch (2.5 cm) from the die and the collector drum is preferably about 2 inches (5 cm) to 4 inches (10 cm) from the die, but can be as much as 8 inches (20 cm) to 10 inches (25 cm) depending on extrusion rates.

The extruded polymer blend should not be subjected to any treatment, such as orientation or stretching, at temperatures above about 60° C because such treatment would transform the polymer blend to a structure predominantly containing crystalline polypropylene.

The polymer blends of the invention can withstand irradiation by sterilizing ionizing radiation such as gamma radiation. The dosage of gamma radiation is generally desirably in the range from about 0.1 Mrad (1.0 kGy) to about 10 Mrad (100 kGy) and preferably in the range from about 1.0 Mrad (10 kGy) to about 6.0 Mrad (60 kGy) for sterilization of medical articles.

The following non-limiting examples are provided to further illustrate the invention.

#### EXAMPLES 1-5

Polypropylene (Cosden 8771, melt index = 9) and polybutylene (Shell 0400, melt index = 20), with a variation of weight percentage by weight shown in Table I for Examples 2-4 were blended by dry blending in the respective weight percentages and then fed into the extrusion hopper of a 5.1 cm (2 inch) Rheotec Extruder. The polybutylene of Example 1 was not dry blended prior to extrusion. The extruder was operated at a flow rate of 9.08 kg/hr, having a screw speed of 20 rpm and temperature zones as follows: Zone 1: 216° C; Zones 2-4: 244° C; Die Zone: 244° C to assure a melt temperature of 244° C. These Examples 1-4 were extruded into four mil (0.102 mm.) films on a chrome plated casting role in which the quench temperature was controlled at 54° F (12.2° C) in order for Examples 2-4 to control the non-crystalline mesomorphous structure of the polypropylene in the blend.

Example 5 prepared by polypropylene films being extruded from Exxon PP-3014 polypropylene polymer (melt flow index - 12; average molecular weight, by GPC: 161,000) using a 1-1/4 inch (3.2 cm) Brabender extruder with a 12 inch (30.5 cm) wide film die at a thickness of about 1.5 mil (0.04 mm) under the following conditions:

Melt temperature (° C)	203
Screw speed (rpm)	40
Polymer flow rate (kg/hr)	5
Die temperature (° C)	204

The films were extruded onto a chrome-plated 3 inch (7.6 cm) diameter casting roll spaced 1 inch (2.5 cm) from the die. The film was in contact with the roll for about 2.5 seconds. The roll was maintained at 6.7° C.

The crystalline structure of each Example 1-5 the blend, or absence thereof, was determined by wide-angle x-ray diffraction (WAXD). For each weight fraction Examples 1-5 there is a corresponding wide-angle x-ray diffraction graph in the Figures 2-6, respectively. The very sharp peaks in the WAXD graph demonstrates the high crystallinity weight fraction of pure polybutylene in FIG. 1 prepared according to Example 1. As the weight fraction of the polybutylene decreases in Examples 2-4, the less pronounced excitation peaks in the WAXD graphs of FIGS. 3-5 demonstrate the decreased relative crystallinity in the polymer blend.

Samples of each film of Examples 1b, 1c, 2b, 2c, 3b, 3c, 4b, 4c, and 5b were irradiated with gamma rays using a cobalt 60 (Co60) source in dosages indicated in Table I. Tensile properties were measured on both irradiated and unirradiated films of the various examples at various times to study the aging effects of the polymer blend and consequent degradation caused by the irradiation. Tensile measurements were performed on an Instron 1122 unit using a 2 inch x 1/2 inch (5.08 cm x 1.27 cm) sample size at a strain test rate of one hundred percent (100%) per minute (2 inches per minute, 5.08 cm per minute) and using the ASTM D882-31 procedure.

Each of the Examples 1-5 was measured for percent elongation at break using ASTM D882-31 procedure, the results of which are tabulated in Table I.

TABLE I

Percent Elongation at Break of Compatible Polymer Blends With and Without Irradiation									
Example	PB/PP Weight Percent	Irradiation Dosage (kGy)	% Elongation at Break After						
			0 mths.	2 mths.	3 mths.	4 mths.	5 mths.	6 mths.	9 mths.
1a	100/0	0	200	--	200	--	--	200	200
1b	100/0	30	200	200	200	180	150	150	125
1c	100/0	60	200	150	130	75	45	25	0
2a	75/25	0	270	--	270	--	--	270	270
2b	75/25	30	270	270	270	270	270	270	270
2c	75/25	60	270	270	270	270	250	240	270
3a	50/50	0	370	--	350	--	--	410	390
3b	50/50	30	370	370	370	370	390	380	340
3c	50/50	60	370	360	400	360	360	370	410
4a	25/75	0	500	--	500	--	--	500	500
4b	25/75	30	500	500	520	500	510	500	500
4c	25/75	60	500	520	460	480	500	--	450
5a*	0/100	0	420	>400	>400	--	--	>400	--
5b*	0/100	30	>400	>400	>400	--	--	>400	--

The polymers of polybutylene and non-crystalline mesomorphous polypropylene are compatible polymers and form an excellent blend in a broad range of mixtures according to the objects of the present invention. Polybutylene and mesomorphous polypropylene are clearly compatible polymers because the blends throughout the range of mixing exhibit a greater percent elongation at break value than hypothetical linear value at the same blend weight fraction as calculated according to the equation described in the Summary of the Invention above. As seen in FIG. 1, the actual measured percent elongation at break value exceeds the hypothetical linear value for each of Examples 2a, 3a, and 4a. Further, Example 4a has an even greater percent elongation at break value than mesomorphous polypropylene homopolymer. Thus, a blend of polybutylene as the compatible polymer is within the scope of the present invention throughout at least nearly the entire range of possible weight fractions.

When subjected to a moderate dose of gamma radiation, polybutylene of Example 1 begins to degrade within four months after irradiation. When subjected to more extreme radiation, the polybutylene of Example 1 begins degrading within two months. Hence, polybutylene alone is not a successful candidate for medical packaging requiring any significant storage time between irradiation and use.

A blend of mesomorphous polypropylene with polybutylene throughout the weight fractions shown in Examples 2-4, demonstrates substantial maintenance of structural integrity and resistance to irradiation degradation at dosages as much as 6.0 Mrad (60 kGy). Indeed, the blends of Examples 3a-c and 4a-c compare favorably in this respect with pure mesomorphous polypropylene of Example 5a-b. This result indicates the blends of this invention appreciably lose none of the radiation resistance provided by mesomorphous polypropylene while providing through careful choice(s) of compatible polymer the packaging properties mesomorphous polypropylene clearly lacks. The blends substantially maintain their structural integrity for useful storage periods, even after irradiation.



Having determined the desired available useful duration of resistance to sterilization irradiation, and then choosing various other properties such as puncture resistance, tear strength and the like desired for the blend as a medical packaging article, one can obtain an acceptable blend within the scope of the present invention.

Yield and break tensile strengths are also indicative of desirable packaging property of tear strength. Table II demonstrates the same five Examples where yield tensile strength and break tensile strength are measured at irradiation dosages of 6 Mrad (60kGy) for a period up to nine months.

TABLE II

Irradiated Compatible Polymer Blend Tensile Strength						
			Irradiation at 60 kGy		Irradiation at 60 kGy	
			Yield Tensile (kg/cm <sup>2</sup> )		Break Tensile (kg/cm <sup>2</sup> )	
Example	WAXD Figure	PB/PP Weight Percent	t = 0	t = 9 mths.	t = 0	t = 9 mths.
1	2	100/0	309.34	*	323.40	*
2	3	75/25	154.67	146.94	316.37	308.64
3	4	50/50	144.83	153.26	284.73	274.19
4	5	25/75	202.48	213.02	246.07	240.44
5	6	0/100	175.76	182.79	186.31	199.67

\* Too brittle to measure.

The data of Table II indicate substantial maintenance of tensile strength for the blends of Examples 2-4 for at least nine months after irradiation and better irradiated break tensile strength of such blends over the tensile strength of mesomorphous polypropylene of Example 5 under the same irradiated conditions.

Break tensile strength of the mesomorphous polypropylene homopolymer of Example 5 is the lowest of all Examples. Conversely, break tensile strength for polybutylene homopolymer of Example 1 is the highest and occurs immediately after irradiation at 6 Mrad (60 kGy). Degradation of polybutylene homopolymer nine months later is too severe even to allow measurement of the tensile strength. Thus, break tensile strength of the blends of Examples 2-4 increases with increasing polybutylene weight fraction, and the break tensile strength of these blends is substantially maintained for at least nine months after irradiation at 6 Mrad (60 kGy). Unexpectedly, the tensile strength of mesomorphous polypropylene destined for irradiation will be improved when such polypropylene is blended with a compatible polymer that alone suffers degradation from such irradiation.

A polymer blend of mesomorphous polypropylene and polybutylene exhibits the property of resistance to sterilization irradiation exclusively found in mesomorphous polypropylene and exhibits the break tensile strength predominantly found in polybutylene, even after exposure to sterilization radiation, which would otherwise embrittle the polybutylene homopolymer. Moreover, because low molecular weight polymers, e.g., polybutylene are well known in the art as being puncture resistant, having good tear strength and being capable of being heat sealed to like materials, its presence in the polymer blend encourages the blend to be used in applications where such packaging properties are required.

#### EXAMPLES 6-10

Medical articles or their packaging often require manufacture or closure by heat sealing a film to itself or against another material. A polymer blend possessing resistance to structurally destructive forms of sterilization should demonstrate acceptable heat sealability.

Examples 6-10 were tested for their heat sealability, against themselves, respectively, or other similar useful heat sealable materials.

Table III below demonstrates how blends of the present invention respond to heat sealing strength tests when heat sealed to other materials including themselves. Crystalline polypropylene heat seal tear strength is provided for comparison purposes.

Examples 6-10 were prepared in a similar manner as those of Examples 1-5 using a 2 Inch (5.08 cm) Berlyn Extruder operated at a flow rate of 9.08 kg/hr, having a screw speed of 37 rpm and a Die Temperature of 221 °C to assure a melt temperature of 221 °C. The blends were extruded into 3.5 mil (0.089 mm) films on a role chilled to 32 °F (0 °C). The crystalline polypropylene was prepared by using bi-axial orientation methods under elevated temperature conditions.

Each of the films were tested by heat sealing such samples using pressures of 40 pounds per square inch (2.8122 kg/cm<sup>2</sup>) for 4 seconds to:

(1) a 3.0 mil (0.0765 mm) film made from low density polyethylene (LDPE) (available from Quantum Resin and branded as NPE 963-2PE) at 210 °C;

(2) a film of CoTran Controlled Caliper ethylene vinyl acetate (EVA), MSP98793, (available from Minnesota Mining and Manufacturing Company of St. Paul, Minnesota) at 210 °C;

(3) a film of Celgard 2400 microporous polypropylene membrane available from Hoescht-Celanese Corporation at 199 °C; and

(4) to another sample of the same film (self) at 199 °C.

Then, each of the films were placed in an Instron 1122 machine to measure tear strength of the heat sealed portions of the samples. Constantly increasing force was applied to pull an unsealed portion of each sample at a 90 ° angle from the heat sealed portion. The heat seal strength data in Table III show the forces at which the heat seals began to fail.

TABLE III

Example	PB/PP Weight Percent	Heat Seal Test Strength (grams/cm)			
		LDPE	EVA	Celgard	Self
6	100/0	35	113	4470	7452
7	60/40	176	2137	7280	7374
8	50/50	176	1650	7956	6481
9	40/60	159	1817	8790	8240
10	0/100	81	2046	4813	9077
Crystalline Polypropylene		81	1476	1037	104

The heat seal tear strength of each of Examples 6-10 to other samples of the same respective Example (self) is significantly high to merit using polymer blends of the present invention in packaging and other uses which requires heat sealing of two pieces of the same material together. Also, the blends of Examples 7-9 compare favorably with polybutylene homopolymer and mesomorphous polypropylene homopolymer, in that the heat seal strength of the blends is not significantly lower than the respective heat seal tear strengths of the homopolymers of Examples 6 and 10. By comparison the heat seal tear strength of crystalline polypropylene is negligible.

With respect to LDPE heat seal tear strength, none of the Examples 6-10 is significantly high to be universally useful as a heat seal candidate with LDPE. However, of the Examples, the blends of Examples 7-9 have higher heat seal tear strength than the homopolymers of Examples 6 and 10 or crystalline polypropylene and may be useful for specific packaging purposes where easier heat seal release is needed.

With respect to Celgard heat seal tear strength, the blends of Examples 7-9 are excellent, stronger than either the polybutylene or mesomorphous polypropylene homopolymer films of Examples 6 and 10 and much stronger than crystalline polypropylene. The polymer blends of the present invention are excellent candidates as films to be heat sealed to films of Celgard; a well known and versatile commercial material.

With respect to EVA, the blends of Examples 7-9 compare favorably with mesomorphous polypropylene homopolymer of Example 10 and crystalline polypropylene, which surprisingly have better heat seal tear strengths than the polybutylene homopolymer of Example 6. The blends of Examples 7-9 are useful in being heat sealed to EVA.

The heat seal tear strength of mesomorphous polypropylene homopolymer compares favorably with or exceeds the heat seal strength of polybutylene homopolymer. Whereas, crystalline polypropylene has not generally been used in the medical packaging art in heat sealable applications, mesomorphous poly-

propylene may be useful. However, mesomorphous polypropylene otherwise lacks other desirable packaging properties such as tear strength and puncture resistance, which may be provided by blending with compatible polymers such as polybutylene.

5

## EXAMPLES 11-15

10 The polymer blends of the present invention have improved high speed puncture resistance and tear strength when compared with mesomorphous polypropylene and low density polyethylene (LDPE). The test used MTS 810 materials testing unit from MTS Systems of Eden Prairie, Minnesota and employing testing procedures from ASTM number D3763. Establishing the puncture rate at 7,700 inches per minute (195.58 m per minute), a probe having a diameter of 1.5 inches (3.81 cm) was impacted against an unsupported sample having a diameter of 5.0 inches (12.7 cm) for each of Examples 11-15 prepared in the same manner as Examples 1-5 and LDPE prepared according to the method indicated in footnote below Table IV.

15 The polymer blends of the present invention also exhibit improved tear strength over mesomorphous polypropylene homopolymer. The test used the Single Tear Test method, ASTM D-1938-67, which measures the force in grams to propagate a tear across a film at a tear rate of 250 mm/min. The film samples for Examples 11-15 were 75 mm long by 25 mm wide, having a single slit 50 mm long 12.5 mm from the longer edge of the sample. Table IV shows the tear strength results.

20

25

30

35

40

45

50

55

TABLE IV

Example*	Improved High Speed Puncture Resistance				Tear Resistance (Machine Direction g/cm of sample thickness)
	PB/PP Weight Percent	Thickness (mm)	Energy to Maximum Force (Joules)		
11	100/0	0.096	1.678		122,000
12	75/25	0.114	1.167		63,000
13	50/50	0.109	0.897		26,900
14	25/75	0.124	0.891		14,200
15	0/100	0.102	0.430		10,800
Low Density Polyethylene (LDPE)**		0.102	0.553		

\* Examples 11-15 prepared in the same manner and correspond respectively to Examples 1-5.

\*\* LDPE prepared from Dowlex 752 available from Dow Chemical Company of Midland, Michigan in the same manner as the samples of Example 5.

The data in Table IV demonstrate that the relatively thin films of the polymer blends in various weight fractions have significantly improved resistance to high speed punctures compared with mesomorphous polypropylene homopolymer or another packaging material such as LDPE. Although the resistance to puncturing decreases as the weight fraction of polybutylene in the polymer blends of the present invention decreases, there is significantly improved high speed puncture resistance in the blends of Examples 12-14 over the resistance found mesomorphous polypropylene homopolymer or LDPE homopolymer. The data in Table IV also demonstrates the improved tear strength of the blends of Examples 12-14 over the tear strength of mesomorphous polypropylene homopolymer of Example 15. Polybutylene homopolymer has excellent tear strength as seen in Example 11, which contributes to the tear strength of Examples 12-14, respectively.

Thus, while mesomorphous polypropylene has excellent radiation resistance and good heat sealability, it lacks the puncture resistance and tear strength that polybutylene can contribute to the polymer blend. For packaging purposes, the weight fractions of the mesomorphous polypropylene and the compatible polymer in the polymer blend may be determined by the relative balance of properties desired for the blend.

#### EXAMPLES 16-19

Other polymers compatible with mesomorphous polypropylene demonstrate the scope of the present invention. FIG. 7 is a graph analogous to the graph of FIG. 1, recording the actual percent elongation at break values to demonstrate the compatibility with mesomorphous polypropylene with Exxelor PA-23 available from Exxon Corporation, which is believed to be an ethylene-based elastomer. FIGS. 8-11 show the relative crystalline and non-crystalline morphologies for various polymer blends of mesomorphous polypropylene and Exxelor PA-23.

That variety of blends of mesomorphous polypropylene (FINA 8771, melt index = 9) and Exxelor PA-23 having the weight percentages shown in Table V were extruded using a 2 Inch (5.08 cm) Rheotec Extruder operating at a flow rate of 9.08 kg/hr, a screw speed of 20 rpm and at a die zone temperature of 232 °C to assure a melt temperature of 232 °C. The blends were extruded in four mil (0.10 mm) films on a chrome casting role in which the quenched temperature was controlled at a temperature less than about 22 °C in order to give a non-crystalline mesomorphous morphology for the polypropylene.

Table V identifies the correlation of each of the Examples 16-19 to the wide-angle x-ray diffraction FIGS. 8-11.

Table V also identifies the percentage elongation at break after each of the examples was sterilized in the same manner as that for Examples 1-5 at 3, 6, and 10 Mrad (30, 60, and 100 kGy) sterilization doses, respectively. Storage time was extended for these Examples to twelve months.

The FIGS. 8-11 show decreasing relative crystallinity with increasing mesomorphous polypropylene weight fraction in the polymer blend.

Table V also provides the unirradiated, zero duration percent elongation at break data for each Example 16a, 17a, 18a, and 19a. The percent elongation at break for mesomorphous polypropylene is obtained from Example 5. A percent elongation at break value of 639% for Exxelor PA-23 was obtained by testing performed on the same size samples of 4.0 mil (0.102 mm) films according to the same testing procedures as that described for Examples 1-5. The graph in FIG. 7 shows that each Example 16a, 17a, 18a, and 19a of the blend has a greater percent elongation at break value than the hypothetical linear value computed according to the equation described in the Summary of the Invention above. Thus, Exxelor PA-23 is another polymer which is compatible throughout at least nearly the entire possible range of weight fractions for the polymer blend of the present invention.

TABLE V

Improved Radiation Resistance for Exxelor PA-23/PP										
Ex.	WAXD Figure	Exxelor PA-23/PP Weight %	Irradiation Dosage (kGy)	% Elongation at Break After						
				0 mths.	1 mth.	2 mths.	3 mths.	6 mths.	9 mths.	12 mths.
16a	8	80/20	0	669	--	--	--	--	--	700
16b	8	80/20	30	--	637	590	671	627	843	683
16c	8	80/20	60	--	612	622	625	593	723	758
16d	8	80/20	100	--	597	601	617	587	594	--
17a	9	60/40	0	649	--	--	--	--	--	693
17b	9	60/40	30	--	599	616	622	654	820	667
17c	9	60/40	60	--	594	655	678	612	644	745
17d	9	60/40	100	--	580	628	610	644	708	715
18a	10	40/60	0	622	--	--	--	--	--	630
18b	10	40/60	30	--	620	571	644	610	611	613
18c	10	40/60	60	--	590	617	633	616	611	694
18d	10	40/60	100	--	601	589	615	581	598	605
19a	11	20/80	0	580	--	--	--	--	--	590
19b	11	20/80	30	--	560	535	587	672	635	605
19c	11	20/80	60	--	563	526	623	617	594	585
19d	11	20/80	100	--	559	464	616	588	541	618

The data in Table V show that even after subjected to irradiation dosages of as much as 10 Mrad (100 kGy), blends having compatible Exxelor PA-23 in weight percents from about twenty percent (20%) to about eighty percent (80%) by weight of the polymer blend show substantial maintenance of structural integrity of the blend as long as one year, even after irradiation.

Indeed, any polymer compatible in a blend with mesomorphous polypropylene having desired properties which are otherwise lacking in the mesomorphous polypropylene homopolymer may be included within the scope of the present invention. The relative weight fractions of the mesomorphous polypropylene and the polymer compatible therewith may be balanced within that determined effective range of weight fractions according to other desired physical properties provided by the compatible polymer, such as additional heat sealing capability, impact resistance, tear strength, and the like.

#### COMPARISON EXAMPLES 20-25

It is important for the polymer blends of the present invention to be prepared under controlled temperature conditions. At the time of extrusion, the polymer blends must be quenched at temperatures less than from about 100° F (38° C). Otherwise, radiation resistance is lost. Table VI demonstrates the deleterious effect of extruding at a slow cooling temperature at about 130° F (55° C).

Examples 20-22 were prepared according to the same process as described for Examples 1-4 except that the cooling temperature was 130° F (55° C). Examples 23-25 were prepared according to the same process as for Examples 16-19 except that the cooling temperature at extrusion was 135° F (57.2° C). Examination of the crystallinity of the blends of each of the examples below in Table VI was made by wide angle x-ray diffraction.

TABLE VI

Ex.	Blend	Weight %	PP Crystal Type	Irradiation Dosage (kGy)	% Elongation at Break After					
					0 mths.	2 mths.	4 mths.	6 mths.	9 mths.	12 mths.
20a	PB/PP	75/25	*	0	280	--	--	310	270	--
20b	PB/PP	75/25	*	30	280	280	250	240	200	--
20c	PB/PP	75/25	*	60	280	200	120	40	10	--
21a	PB/PP	50/50	Crystalline	0	400	--	--	410	380	--
21b	PB/PP	50/50	Crystalline	30	400	400	370	310	270	--
21c	PB/PP	50/50	Crystalline	60	400	300	270	220	100	--
22a	PB/PP	25/75	Crystalline	0	500	--	--	480	500	--
22b	PB/PP	25/75	Crystalline	30	500	500	500	450	420	--
22c	PB/PP	25/75	Crystalline	60	500	--	--	400	150	--
23a	PA-23/PP	80/20	Crystalline	0	681	--	--	--	--	662
23b	PA-23/PP	80/20	Crystalline	30	--	440	--	100	55	--
23c	PA-23/PP	80/20	Crystalline	60	--	410	--	71	21	10
23d	PA-23/PP	80/20	Crystalline	100	--	225	--	37	12	5
24a	PA-23/PP	40/60	Crystalline	0	628	--	--	--	--	632
24b	PA-23/PP	40/60	Crystalline	30	--	575	--	250	150	40
24c	PA-23/PP	40/60	Crystalline	60	--	540	--	170	80	20
24d	PA-23/PP	40/60	Crystalline	100	--	500	--	80	15	7
25a	PA-23/PP	20/80	Crystalline	0	642	--	--	--	--	635
25b	PA-23/PP	20/80	Crystalline	30	--	610	--	410	200	65
25c	PA-23/PP	20/80	Crystalline	60	--	580	--	200	70	21
25d	PA-23/PP	20/80	Crystalline	100	--	40	--	13	11	11

\* Not susceptible to determination

As may be seen from examination of Table VI, the degradation of the blends over time increases with the increase in radiation dosage. All of Examples 20-25 have lower percent elongation at break values with increased irradiation dosages, longer duration, and both. However, when comparing polymer blends of Examples 20-25 shown in Table VI with the polymer blends of the present invention of Examples 2-4 and 16-19 at comparable irradiation dosages for comparable storage times, the same weight fractions comprising the blends when quenched during extrusion at temperatures less than about 38° C, and desirably less than about 24° C resist the structural degradation effects of sterilization irradiation.

The polymer blends of the present invention may be used for a variety of medical or other article or packaging constructions. Because the blends are radiation resistant, films or microfiber webs made from the blends and used as components in medical or other articles or packaging for medical or other articles are capable of maintaining their structural integrity over useful periods of article's shelf and use lives even if subjected to dosages of sterilizing irradiation. Because the blends are heat sealable, puncture resistant and have good tear strength, films or microfiber webs or fibrous webs made from the blends are versatile components for an article or the packaging for an article.

Some utilizations will require radiation resistance; some utilizations will require puncture resistance, tear strength, additional heat sealability, and the like; some will require both. The compatible polymer blends of the present invention can universally serve any of those utilizations even if not all of its benefits are fully being utilized.

Various possible uses of films made from blends of the present invention include packaging for medical articles, such as syringes, requiring sterilization during storage, backings for transdermal delivery patches requiring heat sealability and good tear strength and possible radiation resistance, and sidewalls for ostomy pouches requiring good tear strength, puncture resistance, and heat sealability. This listing is not and should not be construed as exhaustive of the many possible uses of the blends of the present invention.

Films of the polymer blend of the present invention may desirably have an additional layer grafted to the film to enhance other properties such as surface adhesion, permeability, coefficient of friction, or other properties desirable to those skilled in the art for the film. For example, not by way of limitation, surface adhesion is desirable in order to provide the application of primers and other coatings to a film that would

not otherwise adhere well to a film of the polymer blends of the present invention.

Using the methods identified in European Patent Publication EPO 0297741, the surface adhesion layer is desirably grafted to the polymer blend by electron beam irradiation in dosages of from about 0.5 Mrad (5 kGy) to about 20 Mrad (200 kGy) and preferably about 5 Mrad (50 kGy). The compounds desirably to be grafted to the polymer blend film include acrylic acid (AA), dimethylacrylamide (DMA), N-vinyl-2-pyrrolidone (NVP), and a copolymer of NVP and trimethylolpropanetriacrylate (NVP/TMPTA). Other possible compounds to be used as a grafting layer include glycidyl acrylate, hydroxyethyl acrylate, hydroxymethyl acrylate, 2-vinyl pyridine, sulfoethyl methacrylate, elisopropylacrylamide, or N,N-diethylamino acrylate.

Exemplary compounds were grafted onto films prepared in the same manner as that for films of Examples 2 and 4. Grafting used an electron beam generating dosages identified in Table VII in a nitrogen atmosphere at 175kv with a web speed of 25 feet per minute (7.62 m/min).

The strength of the graft was measured using a 180° peel adhesion test described as follows: A 2.5 cm wide, 20.3 cm long strip of pressure-sensitive adhesive tape (Scotch™ brand tape no. 8411) is adhered to a 10.1 cm wide, 15.2 cm long sheet of test substrate with a free end of the tape extending beyond the end of the test substrate. The sample is rolled twice with a 1.35 kg hard rubber roller to ensure contact between the adhesive and the test substrate. The sample is aged at room temperature (22°C) for 24 hours. The free end of the tape is removed from the test substrate at a rate of 6 inches/minute (15.24 cm/minute) using a Slip/Peel Tester, available from Instrumentors, Inc.

Table VII displays the data for the grafted compound, its e-beam irradiation dosage, and peel adhesion results tested at various intervals over at least 6 months time.

TABLE VII

Peel Adhesion Results on Graft Modified Polymer Blends						
Ex.	Grafted Monomer	e-Beam Irradiation (kGy)	Peel Force (g/cm.)			
			1 month	3 months	7 months	9 months
2	Control	50	138	124	-	146
2	AA	50	269	239	-	217
2	DMA	50	411	413	308	314
2	NVP	100	181	180	163	165
2	NVP/TMPTA	100	213	162	167	167
4	Control	50	147	185	-	161
4	AA	50	279	252	-	218
4	DMA	50	411	328	254	-
4	NVP	100	234	217	181	273
4	NVP/TMPTA	100	239	231	287	-

Throughout the range of polymer blend weight fractions, a blend having the grafted monomer of any of the compounds identified above has improved surface adhesion for at least six months after sterilization irradiation.

Table VIII compares the graft-modified polymer blends and the unmodified polymer blends in respect of elongation at break after e-beam irradiation at the dosages shown in Table VIII.



TABLE VIII

% Elongation at Break Comparison						
Ex.	Grafted Monomer	e-Beam Irradiation (kGy)	% Elongation at Break			
			1 month	3 months	7 months	9 months
2	Control	50	315	-	346	395
2	AA	50	323	-	347	361
2	DMA	50	308	-	349	317
2	NVP	100	310	311	382	386
2	NVP/TMPTA	100	314	309	365	388
4	Control	50	525	-	643	669
4	AA	50	438	-	458	638
4	DMA	50	442	-	583	664
4	NVP	100	431	489	687	603
4	NVP/TMPTA	100	423	561	598	624

The various grafted-monomer polymer blends do not suffer degradation to e-beam irradiation. Combined with the radiation resistance of the polymer blends described above, graft-modified polymer blends substantially maintain the structural integrity provided by the polymer blend of the present invention and have the benefit of the improved surface adhesion provided by the grafted-monomer layer.

While in accordance with the patent statutes, description of the preferred weight fractions, processing conditions, and product usages have been provided, the scope of the invention is not to be limited thereto or thereby. Various modifications and alterations of the present invention will be apparent to those skilled in the art without departing from the scope and spirit of the invention. The examples described in this application are illustrative of the possibilities of varying the amounts of polymer in the blend to achieve properties for specific purposes.

Consequently, for an understanding of the scope of the present invention, reference is made to the following claims.

#### Claims

1. A polymer blend comprising:

non-crystalline mesomorphous polypropylene; and

at least a discernible amount of a polymer compatible with said polypropylene.

2. A polymer blend according to Claim 1, wherein said compatible polymer is polybutylene.

3. A polymer blend according to Claim 1, wherein the blend is capable of substantially maintaining its structural integrity after exposure to a dosage of gamma irradiation of from about 0.5 to about 10 Mrads.

4. A polymer blend according to Claim 1, wherein the blend is heat-sealable to itself or other heat-sealable materials.

5. A polymer blend of non-crystalline mesomorphous polypropylene and polybutylene.

6. A method for preparing a polymer blend, comprising:

blending polypropylene and a polymer compatible with said polypropylene to form a polymer blend;

extruding said polymer blend;

quenching said extruded polymer blend immediately after said extruding to provide a mesophorous polymer blend having non-crystalline mesomorphous polypropylene contained therein.

7. A polymer blend according to Claim 1, wherein said blend comprises a film and wherein said film further comprises a surface adhesion layer grafted to said film.

8. A polymer blend according to Claim 7, wherein said surface adhesion layer comprises acrylic acid, dimethylacrylamide, N-vinyl-2-pyrrolidone, a copolymer of N-vinyl-2-pyrrolidone and trimethylolpropanetriacrylate, glycidyl acrylate, hydroxyethyl acrylate, hydroxymethyl acrylate, 2-vinyl pyridine, sulfoethyl methacrylate, elisopropylacrylamide, or N,N-diamino acrylate.

9. A method for preparing a polymer blend according to Claim 6, wherein said quenching further comprises

forming a film of the polymer blend, and wherein said method further comprises after said forming of a film of the polymer blend, the step of grafting a surface adhesion layer to said film in the presence of electron beam irradiation in dosages of from about 0.5 Mrad to about 20 Mrad.

10. A method for preparing a polymer blend according to Claim 9, wherein said surface adhesion layer  
5 comprises acrylic acid, dimethylacrylamide, N-vinyl-2-pyrrolidone, a copolymer of N-vinyl-2-pyrrolidone and trimethylolpropanetriacrylate, glycidyl acrylate, hydroxyethyl acrylate, hydroxymethyl acrylate, 2-vinyl pyridine, sulfoethyl methacrylate, isopropylacrylamide, or N,N-diamino acrylate.

10

15

20

25

30



35


40

45


50

55

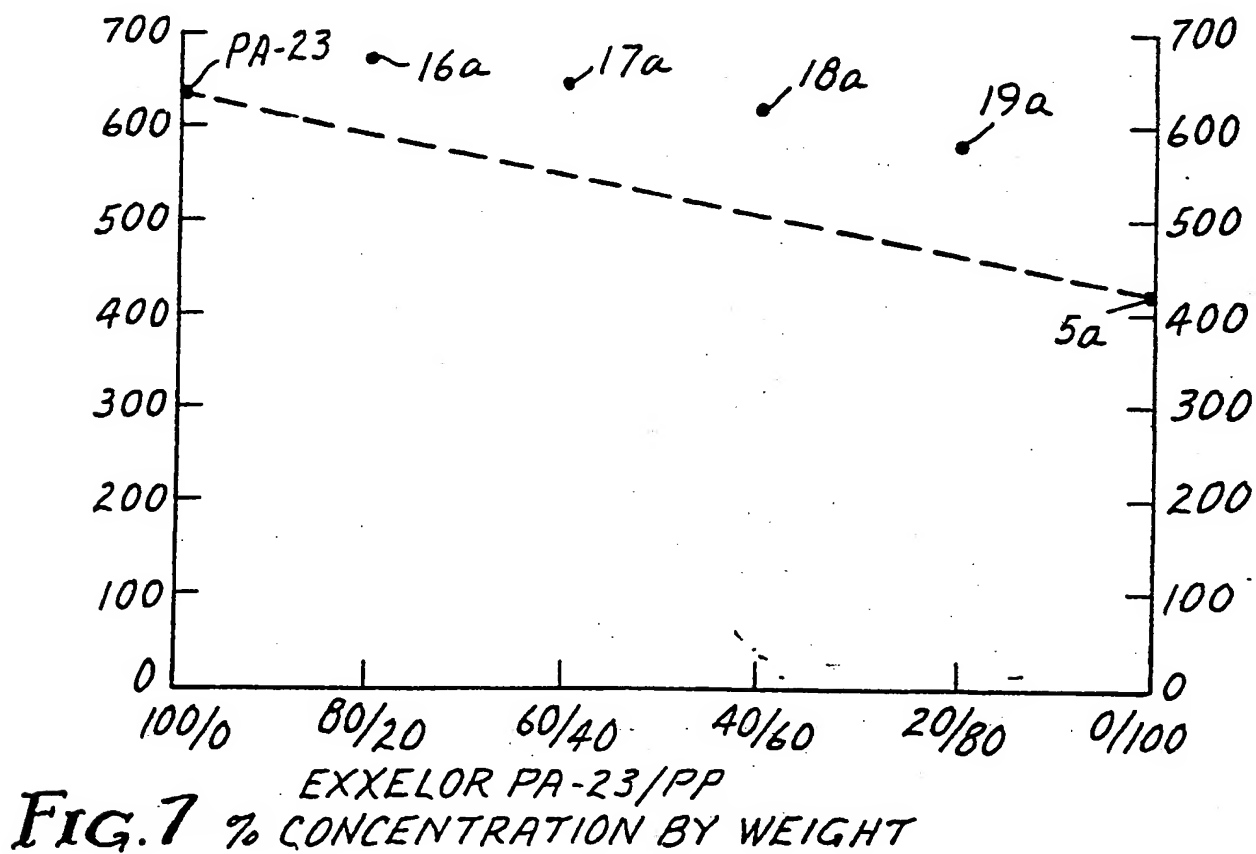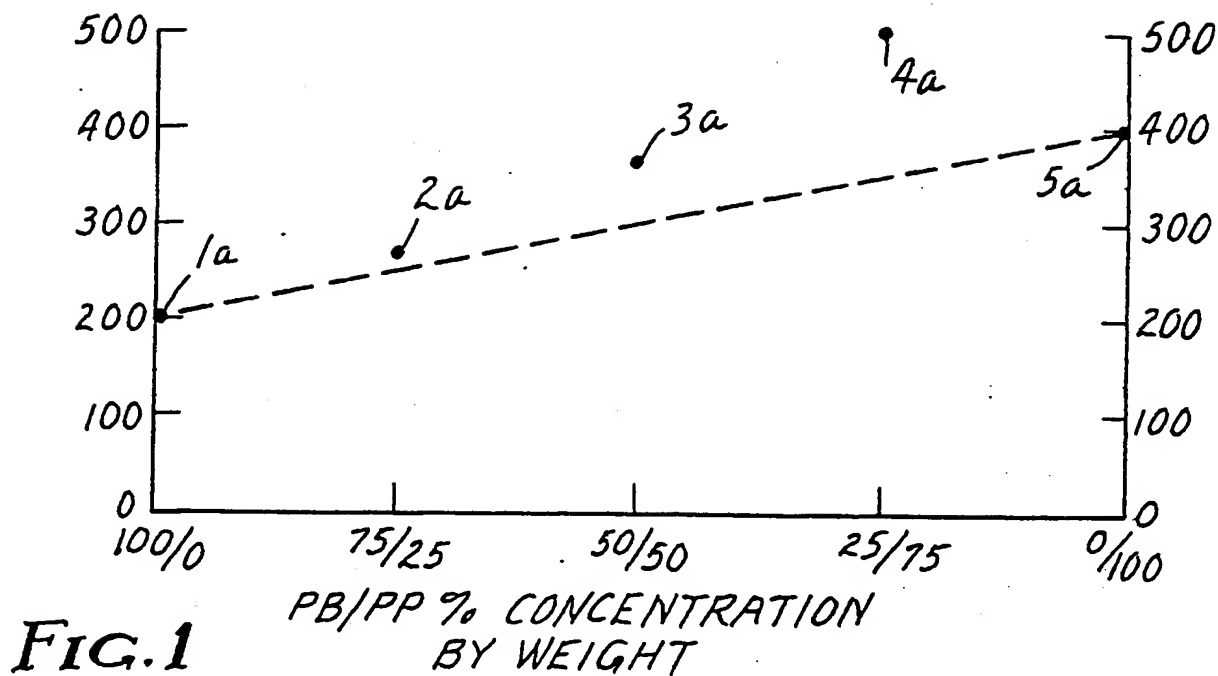


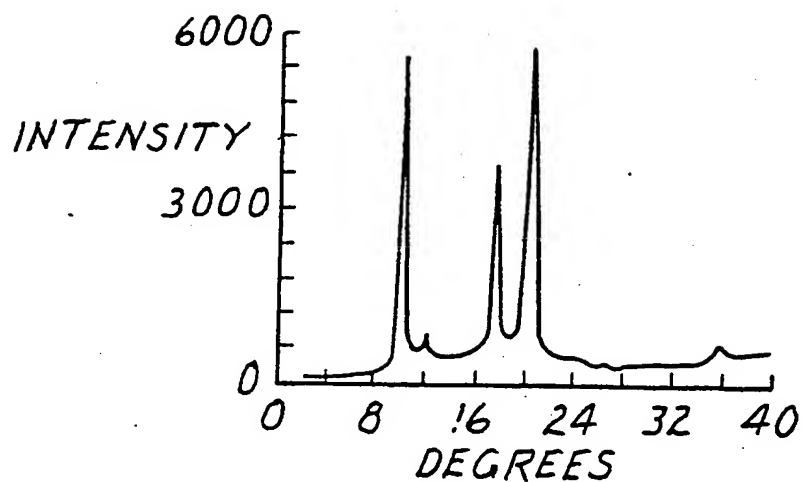


**FIG. 2**

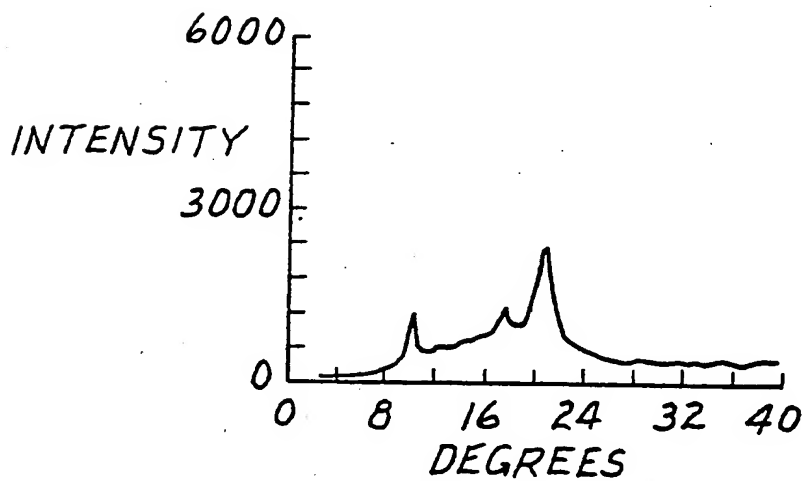


**FIG. 3**

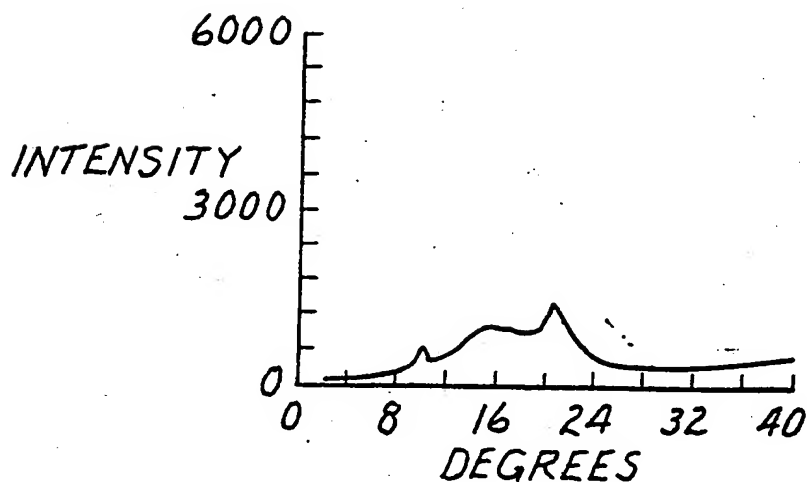


**FIG. 4**

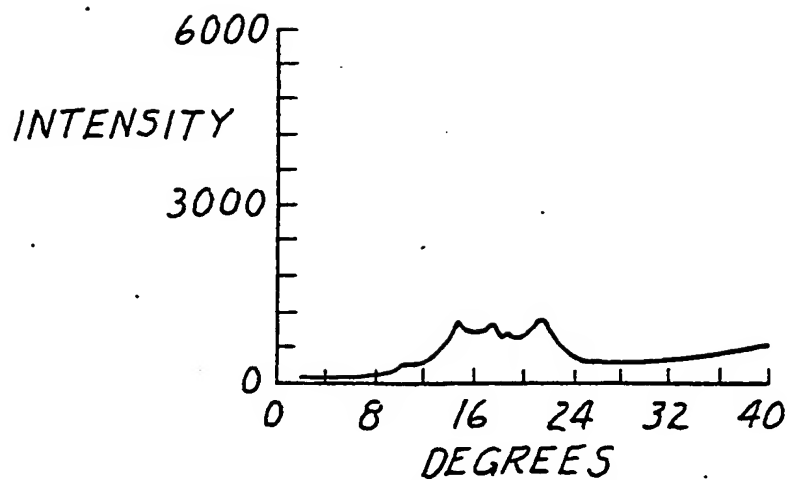


**FIG. 5**

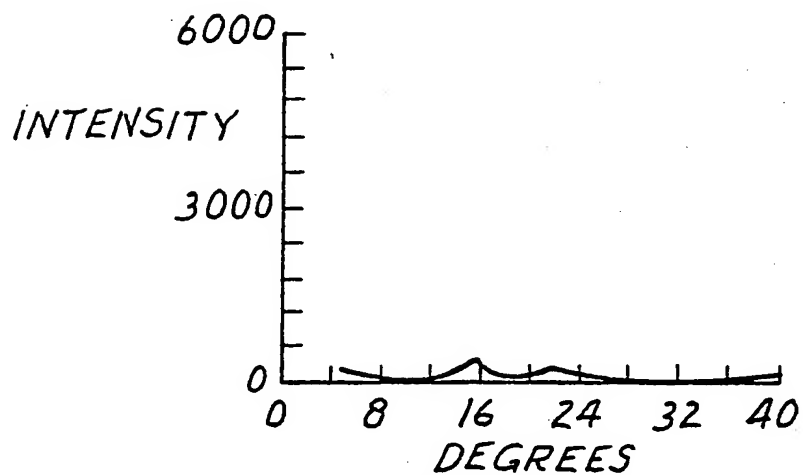


**FIG. 6**

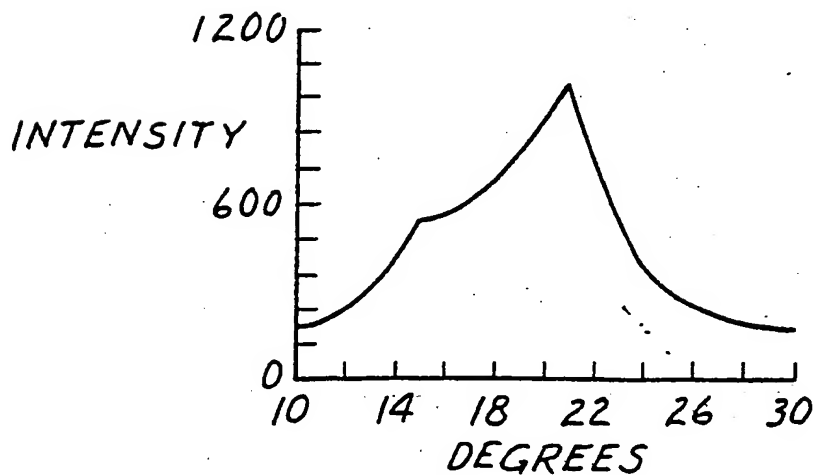


**FIG. 8**

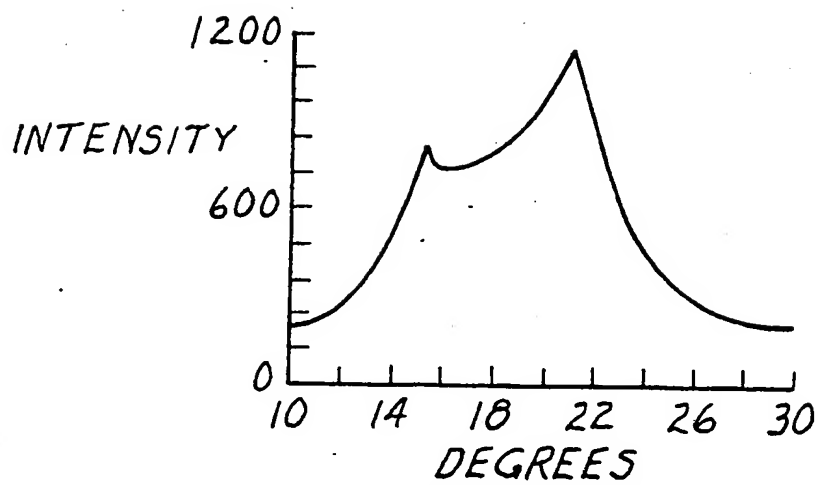

**FIG.9**

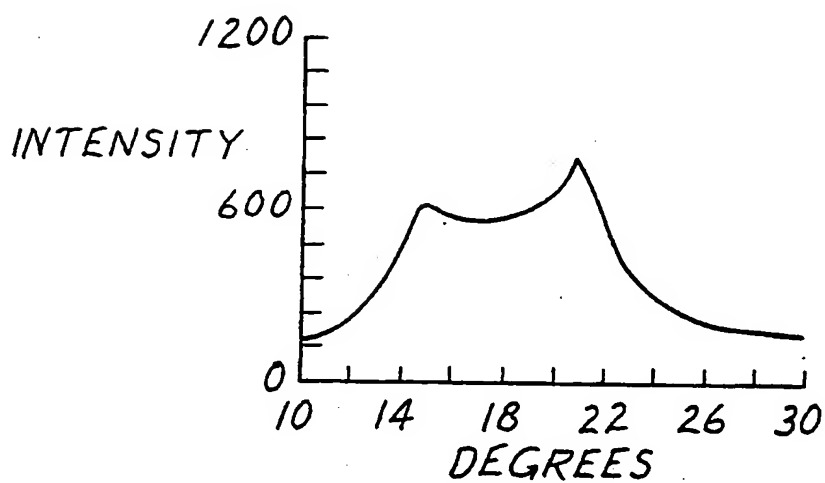

**FIG.10**

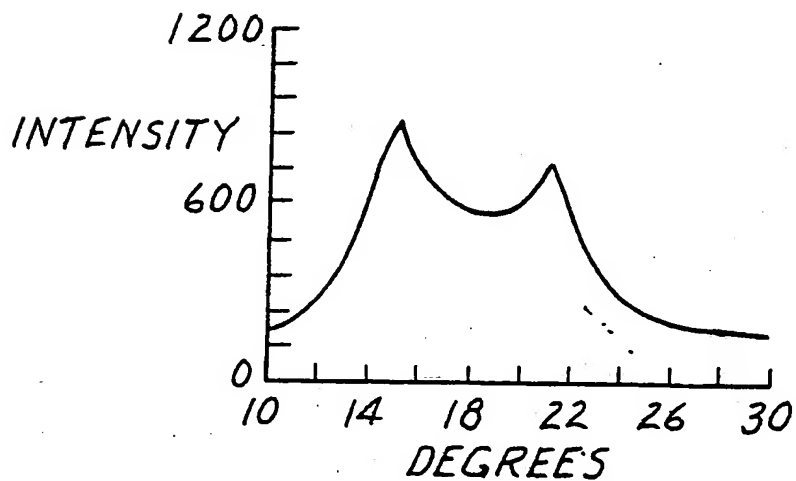

**FIG.11**

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 405 793 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(21) Application number: 90306443.4

(51) Int. Cl.<sup>5</sup>: **C08L 23/12, //(C08L23/12, 23:20)**

(22) Date of filing: 13.06.90

(30) Priority: 26.06.89 US 371713

(43) Date of publication of application:  
02.01.91 Bulletin 91/01(64) Designated Contracting States:  
CH DE FR GB IT LI NL SE(68) Date of deferred publication of the search report:  
20.03.91 Bulletin 91/12(71) Applicant: MINNESOTA MINING AND  
MANUFACTURING COMPANY  
3M Center, P.O. Box 33427  
St. Paul, Minnesota 55133-3427(US)


(72) Inventor: Rolando, Richard J./o Minnesota  
Mining and  
Manufact.Comp., 2501 Hudson Road, P.O.  
Box 33427  
St. Paul, Minnesota 55133-3427(US)  
Inventor: Krueger, Dennis L, c/o Minnesota  
Mining and  
Manufact. Comp., 2501 Hudson Road, P.O.  
Box 33427  
St. Paul, Minnesota 55133-3427(US)

(74) Representative: Baillie, Iain Cameron et al  
c/o Ladas & Parry Isartorplatz 5  
W-8000 München 2(DE)

(54) Radiation resistant heat sealable polymer blends of compatible polymers and methods of preparing same.

(57) Polymer blends of non-crystalline mesomorphous polypropylene and a polymer compatible with such polypropylene and the method of making such polymer blends are provided. Such compatible polymer blends exhibit substantial maintenance of structural integrity after exposure to gamma irradiation and provide heat sealing properties, puncture resis-

tance, and tear strength. Films, fibers, and other articles made from such blends may be used in various applications, including medical articles such as medical packaging films, ostomy pouches, and transdermal delivery patches, which may require sterilized storage prior to usage.

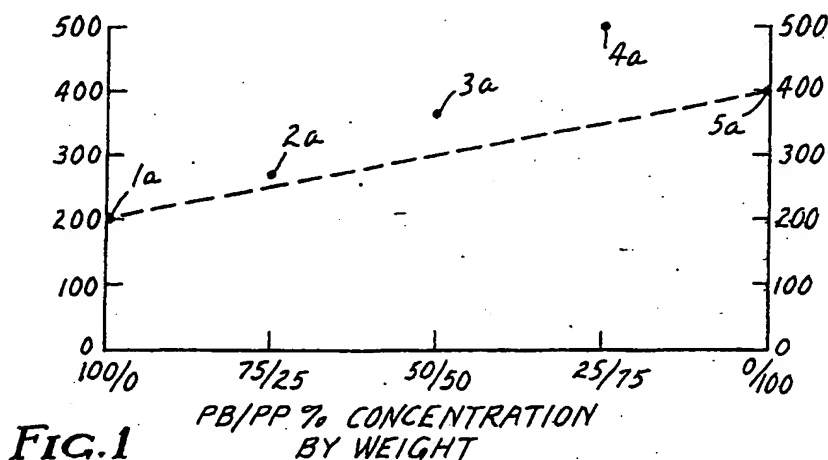

EP 0 405 793 A3



European  
Patent Office

## EUROPEAN SEARCH REPORT

Application Number

EP 90 30 6443

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
A,D	EP-A-0 248 545 (MINNESOTA MINING AND MANUFACTURING) * Abstract *	1	C 08 L 23/12
A	EP-A-0 297 741 (MINNESOTA MINING AND MANUFACTURING) * Abstract *	1	
A	EP-A-0 154 071 (BECTON, DICKONSON AND CO.) * Abstract *	1	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			C 08 L A 61 L
The present search report has been drawn up for all claims			
Place of search		Date of completion of search	Examiner
The Hague		18 December 90	GOOVAERTS R.E.
<b>CATEGORY OF CITED DOCUMENTS</b>			
X: particularly relevant if taken alone		E: earlier patent document, but published on, or after the filing date	
Y: particularly relevant if combined with another document of the same category		D: document cited in the application	
A: technological background		L: document cited for other reasons	
O: non-written disclosure			
P: intermediate document		&: member of the same patent family, corresponding document	
T: theory or principle underlying the invention			